



Snazzi* V DV+DVDIO

* MASTER DVD AND VCD WITH UNCOMPROMISED QUALITY AND TV OUT RECORDING

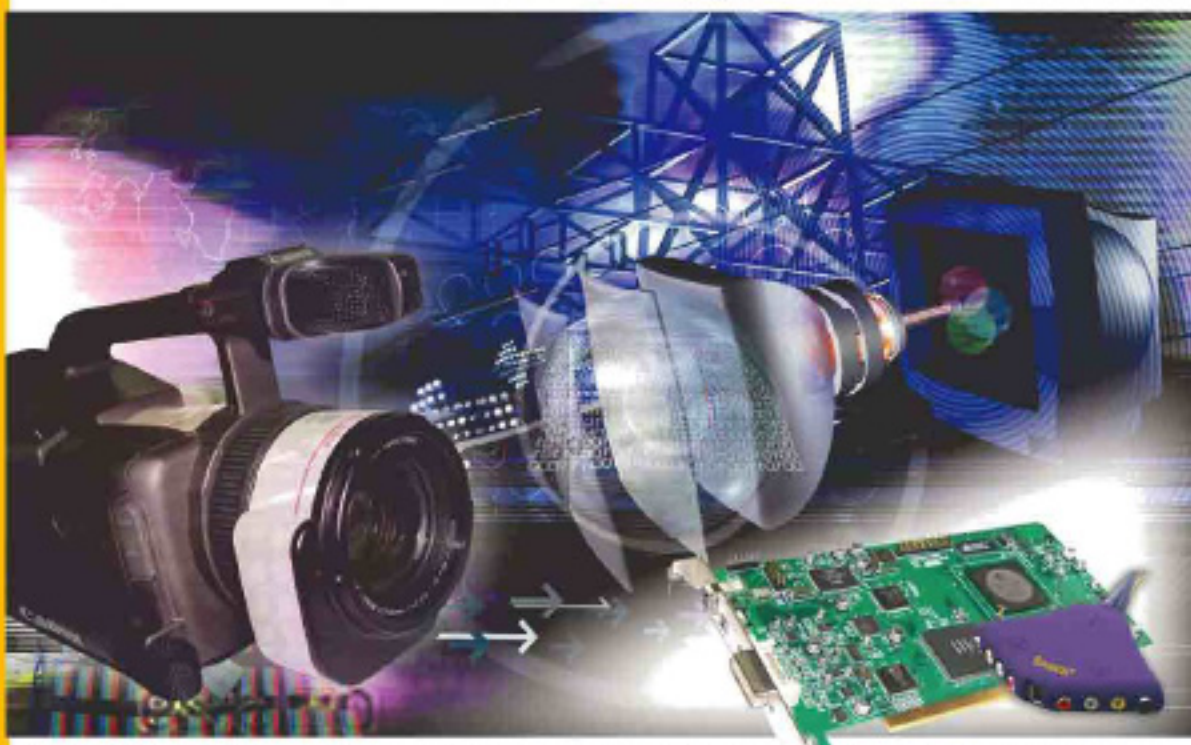

Snazzi* V is now the 5th generation of the Snazzi* MPEG Hardware Encoder family. It features DV transfer, additional AV to DV conversion for DV editing and advanced video signal filtering technology thus providing the ultimate visual and audio clarity in your final production. It incorporates the latest video compression technology to accomplish superior quality in MPEG-1, MPEG-2 and DV-AVI real-time encoding. Snazzi* V is also an MPEG Hardware Decoder to deliver cinema quality playback and VCR recording. This product supports excellent VCD encoding and MPEG-2 DVD Main Profile at Main Level (MP@ML) Full D1 and I-frame compression. With up to 15mbps MP@ML quality, it delivers video and audio contents with uncompromised-quality required by Today's professionals.

- ★ SUPERIOR QUALITY MPEG-1/2 VCD/DVD HARDWARE ENCODER AND AV TO DV-AVI CONVERSION FOR NLE
- ★ HARDWARE MPEG DECODER FOR TV-OUT PLAYBACK AND VCR RECORDING
- ★ I-FRAME MPEG ENCODING FOR PROFESSIONAL NLE WITH GUARANTEED A/V SYNC IN LONG RECORDINGS
- ★ ADVANCED PRE-FILTERS FOR VIDEO ENHANCEMENT AND HIGH QUALITY STILL IMAGE CAPTURE
- ★ DAILY, WEEKLY, MULTIPLE SCHEDULED RECORDING AND PRE-DEFINED FILE SIZE RECORDING
- ★ PAUSE/RESUME FUNCTION FOR SELECTIVE SEGMENT RECORDING
- ★ SUPPORTS CBR/VBR RECORDING AND NTSC/PAL STANDARDS

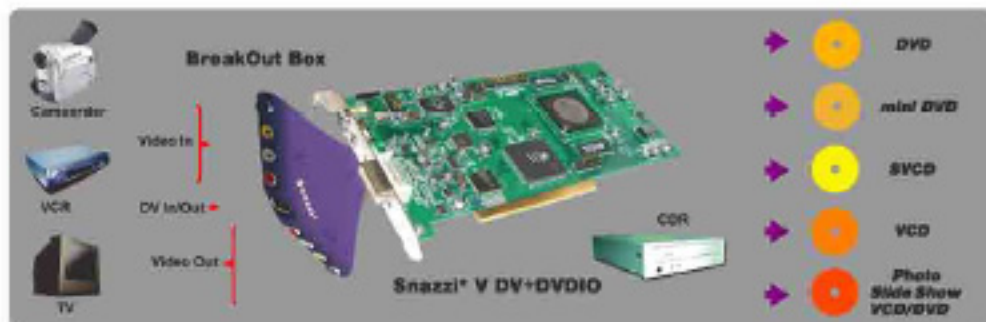

* Snazzi



Snazzi* V DV+DVDIO

SYSTEM REQUIREMENTS

OS: Win 1.4 or higher
 OS: Windows XP
 RAM: 118 MB minimum
 Disk Space: 60MB - Snazzi Software / 200MB - Bundled MPEG Video / 25MB All bundled software recorded files
 Graphics: 800 x 600, Direct Draw Compatible Graphics Card

VIDEO SPECIFICATIONS

Video Format: MPEG-2(D1, 2/3 D1, Full D1), MPEG-1 (SP)
 Capture Resolution: NTSC - 720x480, 480x480, 352x240, 320x240, 176x120, 160x120
 PAL - 720x576, 480x576, 352x288, 176x144
 Frame Rate: 30 fps - NTSC, 25 fps - PAL
 Video Bitrate: 0.5-15 Mbits/sec, CBR/VBR
 Inputs: Composite and S-Video: NTSC, PAL
 Outputs: Composite and S-Video: NTSC, PAL
 Playback Resolution: Computer: Up to full screen

AUDIO SPECIFICATIONS

Audio Format: MPEG and PCM (MPA, WAV)
 Bitrate: 8Kb/sec to 384Kbps
 Sampling Frequency: 32Kbps, 41.1Kbps, 48Kbps
 Modes: Mono, Stereo
 Line Input/Output: RCA Stereo jacks

PACKAGE CONTENTS

- Snazzi* V PCI card
- A/DV BreakOut Box
- Snazzi* software suite
- User Manual
- Quickstart
- Video Cables: S-Video (1), Composite RCA (1)
- Audio Cables: RCA to RCA(1)
- Warranty Card



SN7900

Distributor/Dealer

Snazzi* Movie Studio S5



Key Features

- Create Studio Quality videos on VCD/DVD
- CBR/VBR and resolution support up to Full D1

- Built-in presets to simplify the VCD, SVCD, DVD and DV creation
- Advanced Controls for I-Frame encoding and A/V split capture
- Superior quality decoding for watching movies on TV
- Brightness, Contrast, Hue and Saturation control
- Still image snapshot in BMP, PNG, JPG and TIFF
- Recording Scheduler for daily, weekly and multiple sessions
- Playback Sequencer for video playlist
- Video Gallery for clips management
- Fast resizing of compact GUI
- Instant encoding pause/resume

interVideo WinDVD Creator 2 Platinum



- Create or convert your home movies into professional looking DVDs that will play in your living room
- Import or capture your footage from camcorders or analog source
- Make your own MPEG-4 movies for online viewing
- Advanced Scene Editing: Record TV Show and easily cut out the commercials, or delete sections of your home movie based on the time-line
- Direct Record to Disk
- Support For All Formats: Record in DVD+/-R/RW, DVD+/-VR, and DVD-Video

mjvee 3 magicMoments



- Automatically removes low-quality video material
- Automatically cuts video to rhythm of music
- Automatically matched transitions to music
- Mix video soundtracks with music
- 24 highly differentiated editing styles
- Input video in AVI, DV, MPEG-1, MPEG-2
- Input JPG/JPEG photo and GIF pictures
- Use any WAV, MP3, WMA music files
- Set your own output movie length (Output formats: DV, AVI, WMV, MPEG-1, MPEG-2)
- Specify "must have" shots and "must exclude" shots before make movies
- Share your movies by email or export to DV tape



DVD MovieFactory 3

Author

- Use ready-to-go menus, templates, attractive backgrounds, and audio clips to build your menus
- Make Scanned or Digital Photos into PictureShow on VCD and DVD disk
- Burn & Play
- Play your movies on home DVD players and I-GOs with playback software



interVideo WinDVD 5

- Plays a movie faster or slower without distorting the audio
- Plays movie as desktop wallpaper, behind the desktop's icons and window
- Plays DVD content from the hard disk



DBSN8832A



Manufactured by
V ONE Multimedia Pte Ltd
 Email: sales@vonemm.com
 www.vonemm.com